

# 12V100AH

CE



#### **Features:**

- ▲ Maintenance-free operation
- ▲ Stable quality and high reliability
- ▲ Compact design
- ▲ 10 years design time (at  $25^{\circ}$ C)

# **Applications:**

- **♦** UPS
- ★ Emergency lighting
- ▲ Solar panel system
- ▲ Alarm and security system
- $\clubsuit$  Telecommunication system

- ♣ Fire alarm and security systems
- ◆ DC power supply Auto control system
- ◆ Backup power for testing and measuring instruments
- ♠ Electronic apparatus and equipment Communication power supply
- ♠ etc

# **Specifications:**

Туре	Specification								
Nominal Voltage	12v(6cells)								
	100ah (10hrs, 25°C/77°F)								
Nominal Capacity	85ah (5hrs, 25℃/77°F)								
	60ah (1hrs, 25°C/77°F)								
	Length: 507±2mm								
Dimension	Width: 110±2mm								
	Container Height: 223±2mm								
	Total Height(with Terminal):228±3mm								
Approx Weight	32.5kg								
Terminal	Т3								
Container material	ABS								
Max.Discharge Current	1000A(5s)								
Internal Resistance	Approx 5.5mΩ								
	Discharge:-15-50 °C (5-122 °F)								
Operation Temp.Range	Charge: 0-40 ℃ (32-104 °F)								
	Storage: -15-40 ℃ (5-104 °F)								
Nominal Operating Temp.Range	25±3℃(77±5°F)								
Cycle Use	14.4V-14.8V(25℃/77°F) Coefficient:30mv/ ℃ (Initial charging current less than 16.5A)								
Standby Use	13.5V-13.8V(25°C/77°F) Coefficient:20mv/ °C (No limit on Initial Charging Current)								
	103% 40°C(104°F)								
Capacity affected by Temp.	100% 25°C(77°F)								
	86% 0°C(32°F)								


# Self Discharge:

KANGLIDA batteries maybe stored for up to 6months at 25°C (77°F) and then a freshing charge is required, for higher temperatures the time interval will be shorter.

Constant Current Discharge(Amperes at 25°C/77 °F)										Constant Power Discharge(Watts per cell at 25°C/77 °F)												
F.V/Time	10min	15min	30min	45min	1h	2h	3h	5h	10h	20h		F.V/Time	10min	15min	30min	45min	1h	2h	3h	5h	10h	20h
1.80V/cell	186	152	95	73	59.3	34.6	26.0	17.9	10.4	5.41	1	1.80V/cell	341	288	178	138	115.4	66.7	50.4	35.4	20.8	10.70
1.70V/cell	218	178	102	78	62.9	36.6	27.2	18.5	10.6	5.56	1	1.70V/cell	385	218	191	149	119.7	70.1	52.5	36.3	21.1	10.98
1.60V/cell	244	197	112	84	67.6	38.7	28.5	19.2	10.8	5.72		1.60V/cell	419	344	208	157	127.5	73.0	54.5	37.2	21.3	11.25


Note: the above characteristics data are average values obtained within three charge/discharge cycles, not the minimum values.


#### **Dimensions:**

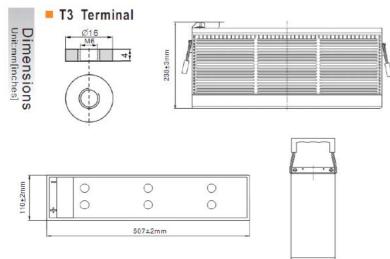


# **Characteristics:**


Charge characteristic Curve for standby use






Temperature Effects in Relation to Battery Capacity





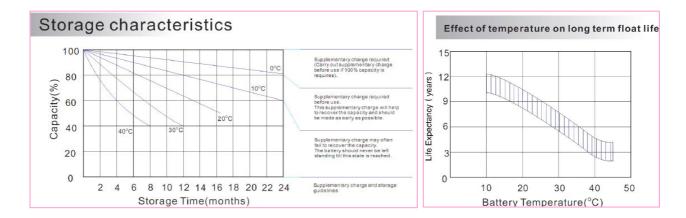

#### **Attentions:**

1. After received product, please checked box damaged or not, if find crack on battery body, contact with us and logistics, it should be caused by boorish handle during delivery;

2. Don't pull or shake terminal, otherwise, it may cause terminal loosen;

3.Battery is not allowed close to Tepid source or basked under the sun for a long time;

4. Charge in the obturate container is not allowed;

5. No short circuit. Battery should be stored full of electronic when not in need, and the battery should be charged every three months in order to avoid the irreversible sulphation. When battery case bursts or electrolyte leaks, battery should be changed lest the acid corrosion.

6.No battery in environment with the acid gas.

7.When battery is used as the backup battery, be careful and check it at regular time to avoid the damage battery. Especially the battery beyond one year should be checked in time, and change the less capacity and scrapped battery. (some batteries maybe have voltage but no current; some batteries maybe have current but no voltage; some maybe have both but less capacity:all these conditions cannot meet the work, reach the power-on time. Do not forth small battery, cause the huge losses )

8. Forbidden put battery in the fire, otherwise it will cause an explosion.

9. When battery cracks or leaks, please use cotton cloth clean it. When skin contacts to the liquid, wash with fresh water immediately. See doctor if serious. 10. No wash on the surface of the battery with the organic solution.