

# 12V90AH



## **Features:**

- ▲ Maintenance-free operation
- ▲ Stable quality and high reliability
- ▲ Compact design
- ▲ 10 years design time (at 25°C)

# **Applications:**

- **♦** UPS
- **♠** Emergency lighting
- ♠ Solar panel system
- ♠ Alarm and security system
- **♠** Telecommunication system

- ♠ Fire alarm and security systems
- ♠ DC power supply Auto control system
- ♠ Backup power for testing and measuring instruments
- ♠ Electronic apparatus and equipment Communication power supply
- **♦** etc

# **Specifications:**

Туре	Specification					
Nominal Voltage	12v(6cells)					
	90ah (10hrs, 1.80v/cell, 25°C/77°F)					
Nominal Capacity	76ah (5hrs, 1.75v/cell, 25℃/77°F)					
	54ah (1hrs, 1.60v/cell, 25°C/77°F)					
	Length: 306±2mm					
Dimension	Width: 168±2mm					
Dimension	Container Height: 210±2mm					
	Total Height(with Terminal):214±3mm					
Approx Weight	27.0kg					
Terminal	T3 or F5					
Container material	ABS					
Max.Discharge Current	8500A(5s)					
Internal Resistance	Approx 6.5mΩ					
	Discharge:-15-50 ℃ (5-122°F)					
Operation Temp.Range	Charge: 0-40 °C (32-104 °F)					
	Storage: -15-40 ℃ (5-104°F)					
Nominal Operating Temp.Range	25±3°ℂ(77±5°F)					
Cycle Use	14.4V-14.8V(25℃/77°F) Coefficient:30mv/℃ (Initial charging current less than 16.5A)					
Standby Use	13.5V-13.8V(25℃/77°F) Coefficient:20mv/℃ (No limit on Initial Charging Current)					
	103% 40℃(104°F)					
Capacity affected by Temp.	100% 25°C(77°F)					
	86% 0°C(32°F)					

# **Self Discharge:**


KANGLIDA batteries maybe stored for up to 6months at 25 °C (77°F) and then a freshing charge is required, for higher temperatures the time interval will be shorter.

Constant Current Discharge(Amperes at 25°C/77 °F)										
F.V/Time	10min	15min	30min	45min	1h	2h	3h	5h	10h	20h
1.80V/cell	161	131	82	63	51.3	30.0	22.5	15.5	9.1	4.68
1.70V/cell	189	154	88	68	54.5	31.7	23.6	16.0	9.3	4.82
1.60V/cell	212	170	97	73	58.5	33.5	24.7	16.7	9.5	4.95


Constant Power Discharge(Watts per cell at 25°C/77 °F)										
F.V/Time	10min	15min	30min	45min	1h	2h	3h	5h	10h	20h
1.80V/cell	295	249	154	120	99.9	57.7	43.7	30.6	18.0	9.26
1.70V/cell	333	275	166	129	103.6	60.7	45.5	31.4	18.3	9.50
1.60V/cell	363	298	180	136	110.3	63.2	47.2	32.2	18.5	9.74


Note: the above characteristics data are average values obtained within three charge/discharge cycles, not the minimum values.


## **Dimensions:**

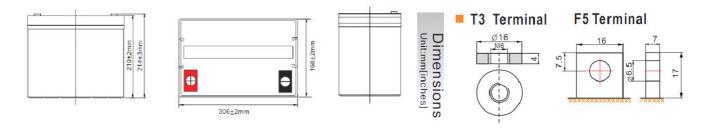



## **Characteristics:**










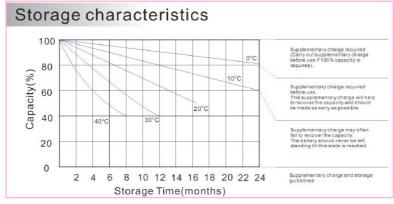



#### **Maintenances and Attentions:**

- 1.Battery is not allowed close to Tepid source or basked under the sun for a long time;
- 2.charge in the obturate container;
- 3.No short circuit. Battery should be stored full of electronic when not in need, and the battery should be charged every three months in order to avoid the irreversible sulphation. When battery case bursts or electrolyte leaks, battery should be changed lest the acid corrosion.
- 4. No battery in environment with the acid gas.
- 5. When battery is used as the backup battery, be careful and check it at regular time to avoid the damage battery. Especially the battery beyond one year should be checked in time, and change the less capacity and scrapped battery. (some batteries maybe have voltage but no current; some batteries maybe have current but no voltage; some maybe have both but less capacity: all these conditions cannot meet the work, reach the power-on time. Do not forth small battery, cause the huge losses.)
- 6. Forbidden battery in the fire, otherwise it will cause an explosion.
- 7. When battery cracks or electrolyte leaks, please use cotton cloth clear it. When skin contacts to the liquid, please wash with fresh water immediately. See doctor if serious.
- 8. No wash on the surface of the battery with the organic solution.