



# 2V300AH



## Features:

- ▲ Maintenance-free operation
- ▲ Stable quality and high reliability
- ▲ Compact design
- ▲ 12 years design time (at 25°C)

## Applications:

- ♣ UPS (Uninterruptable Power System)
- ♣ Emergency lighting
- ♣ Solar panel system
- ♣ Alarm and security system
- ♣ Tele-communication system
- ♣ Fire alarm and security systems
- ♣ DC power supply Auto control system
- ♣ Backup power for testing and measuring instruments
- ♣ Electronic apparatus and equipment Communication power supply
- ♣ etc



## Specifications:

Type	Specification
Nominal Voltage	2v
Nominal Capacity	300ah
Dimension	Length: 171±3mm
	Width: 151±3mm
	Container Height: 330±3mm
	Total Height(with Terminal):356±3mm
Approx Weight	18.0kg
Terminal	T11
Container material	ABS
Rated Capacity	315ah (20hrs, 1.80V/cell,25°C/77°F)
	300.0ah (10hrs, 1.80V/cell,25°C/77°F)
	240.0ah (5hrs, 1.75V/cell,25°C/77°F)
	180.0ah (1hrs, 1.60V/cell,25°C/77°F)
Max.Discharge Current	2000A(5s)
Internal Resistance	Approx 1.0mΩ
Operation Temp.Range	Discharge:-15-50°C(5-122°F)
	Charge: 0-40°C(32-104°F)
	Storage: -15-40°C(5-104°F)
Nominal Operating Temp.Range	25±3°C(77±5°F)
Cycle Use	2.35V-2.4V(25°C/77°F) Coefficient:30mv/°C (Initial charging current less than 120A)
Standby Use	2.25V-2.3V(25°C/77°F) Coefficient:20mv/°C (Initial charging current less than 45A)
Capacity affected by Temp.	103% 40°C(104°F)
	100% 25°C(77°F)
	86% 0°C(32°F)

## Self Discharge:


KANGLIDA batteries may be stored for up to 6 months at 25°C (77°F) and then a refreshing charge is required, for higher temperatures the time interval will be shorter.

## Dimension:

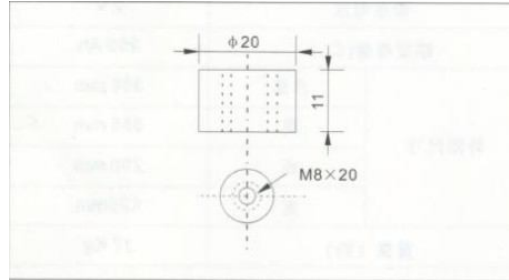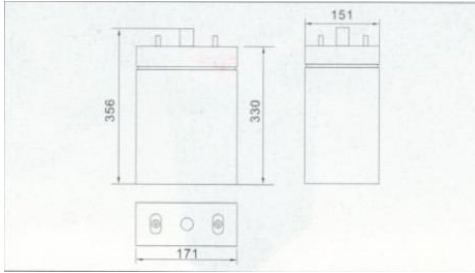


## Characteristics:


### Discharge Characteristics

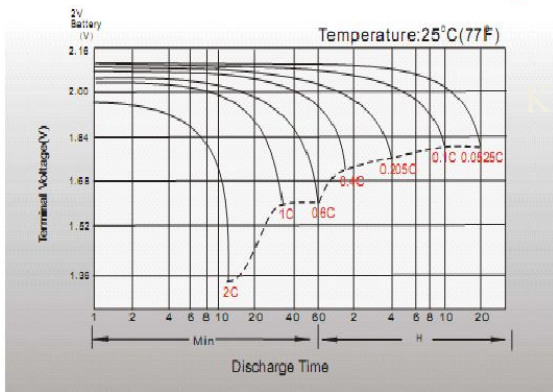


### Float Charging Characteristics

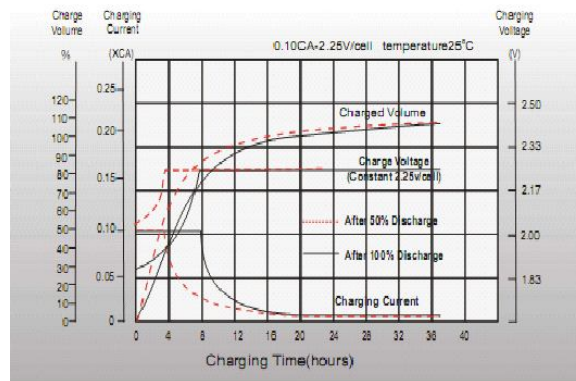


### Temperature Effects in Relation to Battery Capacity

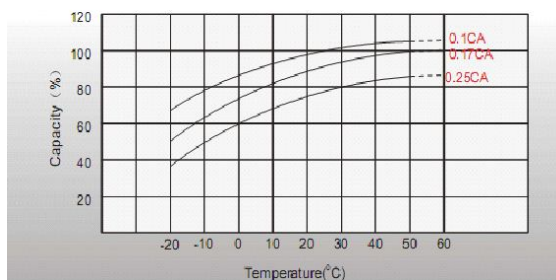


### Self Discharge Characteristics

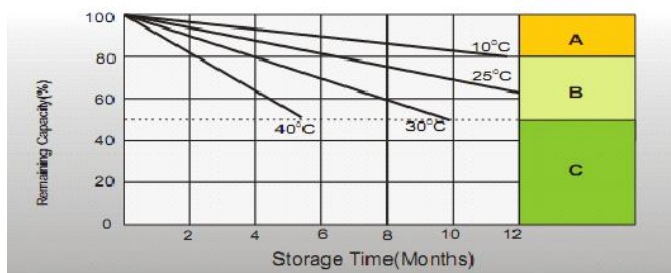

### Cycle Life in Relation to Depth of Discharge

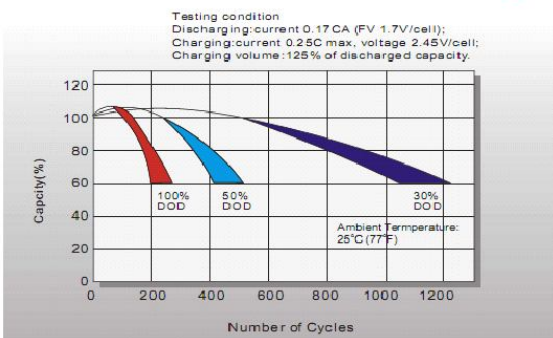

### Effect of Temperature on Long Term Float Life

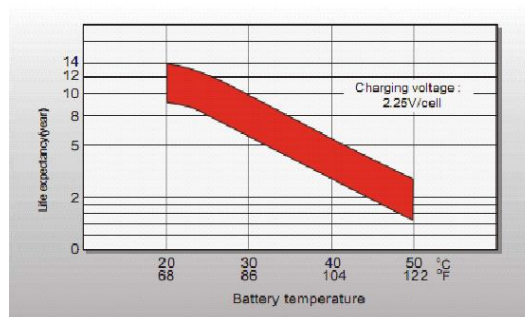

## **Attentions:**

1. After received product, please checked box damaged or not, if find crack on battery body, contact with us and logistics, it should be caused by boorish handle during delivery;
2. Don't pull or shake terminal, otherwise, it may cause terminal loosen;
3. Battery is not allowed close to Tepid source or basked under the sun for a long time;
4. Charge in the obturate container is not allowed;
5. No short circuit. Battery should be stored full of electronic when not in need, and the battery should be charged every three months in order to avoid the irreversible sulphation. When battery case bursts or electrolyte leaks, battery should be changed lest the acid corrosion.
6. No battery in environment with the acid gas.
7. When battery is used as the backup battery, be careful and check it at regular time to avoid the damage battery. Especially the battery beyond one year should be checked in time, and change the less capacity and scrapped battery. (some batteries maybe have voltage but no current; some batteries maybe have current but no voltage; some maybe have both but less capacity; all these conditions cannot meet the work, reach the power-on time. Do not forth small battery, cause the huge losses )
8. Forbidden put battery in the fire, otherwise it will cause an explosion.
9. When battery cracks or leaks, please use cotton cloth clean it. When skin contacts to the liquid, wash with fresh water immediately. See doctor if serious.
10. No wash on the surface of the battery with the organic solution.

康利达国际控股集团有限公司 **KANGLIDA INTERNATIONAL HOLDING GROUP CO., LTD**

郑州康利达电子电源有限公司 **Zhengzhou Kanglida electronic power Co., LTD**

<http://www.cnbattery.cn> Fax: 86-371-68786444

<http://www.kldzdy.com> Tel: 86-371-6876444/55628530-816